




NTD SHIELDING SERVICES LTD

www.ntdshielding.co.uk

6 WAY FIBRE OPTIC WAVE GUIDE

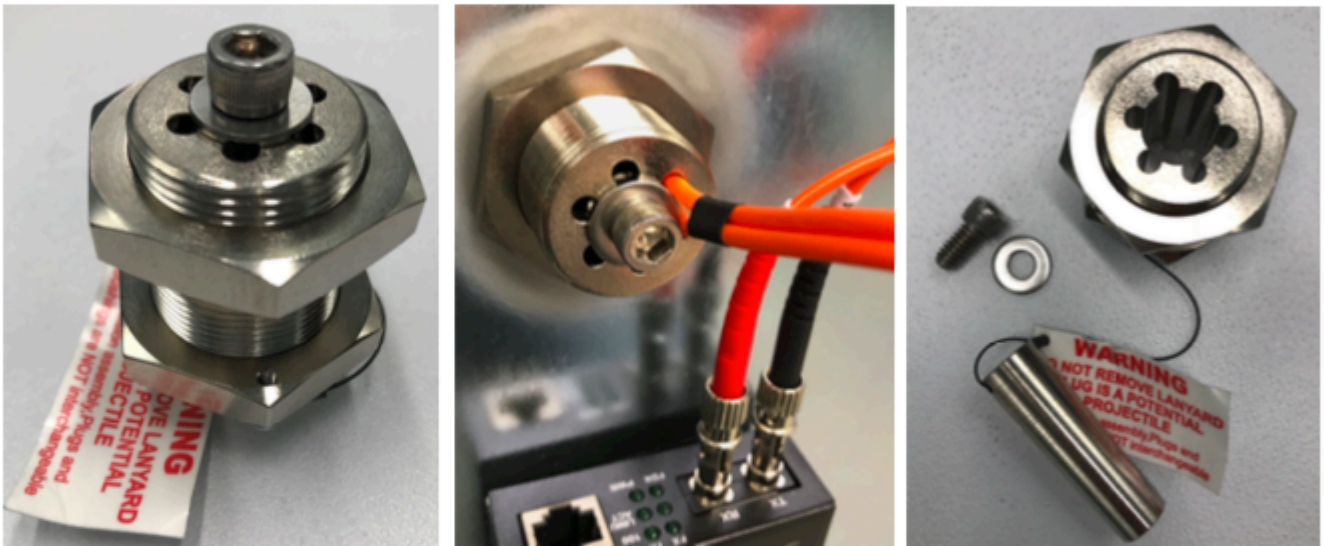

Product Features

- Waveguide Filter with removable plug for transmission of pre-terminated fibre optic cables into the test environment without compromising shield performance.
- 44.2GHz Cutoff .
- Each unit can accommodate 6 single fibre optic cables.
- Can be retro fitted into most common types of shield.
- Complete with tempest hazard warning tag and lanyard from body to core.

Shielding Effectiveness	
Electric field	200KHz - 50MHz \geq 110dB
Flat wave	50MHz - 1GHz \geq 110dB
Microwave	1GHz - 10GHz \geq 100dB 10GHz - 18GHz \geq 100dB

NTD SHIELDING SERVICES LTD

Unit 6, Fleet Lane Industrial Estate, St Helens, Merseyside, United Kingdom, WA9 1TA

Tel: +44 (0) 1744632156 Mob: +44 (0) 7920047059 Email: sales@ntdshielding.com

CALL US FOR FURTHER INFORMATION